



## OUTPUT SHAFT COUPLING & PROPELLER COUPLING DIMENSION

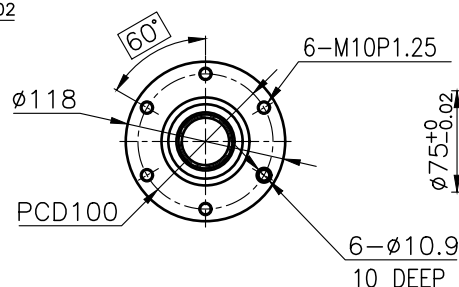

## INPUT COUPLING DIMENSION

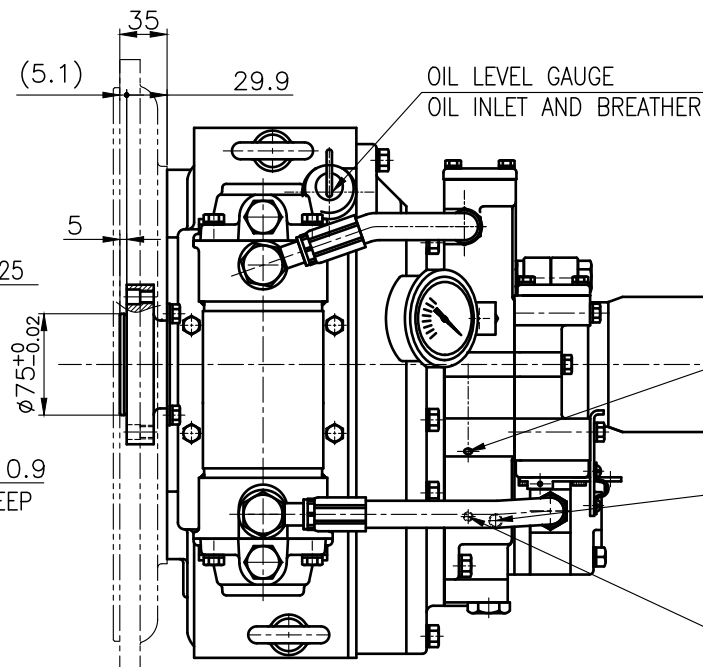

OIL LEVEL GAUGE  
OIL INLET AND BREATHER

FORWARD CLUTCH  
—ACTUATING PRESSURE  
(NPT1/16-27)

Lub' Press' Check Port  
(PT 1/8-28)

REVERSE CLUTCH  
— ACTUATING PRESSURE  
(NPT1/16-27)

UNION BOLT  
(M18P1.5)

PF1 1/4 BOTH SIDERS  
(INLET OR OUTLET OF COOLING WATER)

—ZINC ANODE

MAIN PRESSURE GAUGE PORT  
(NPT 1/8-27)

EYEBOLT FOR LIFTING  
MARINE TRANSMISSION  
(2-BOLTS ONE EACH SIDE)

° AHEAD


NEUTRAL

EASTERN

NIPPLE  
(UNF 3/4-16)

REVERSE

OUTPUT SHAFT DIRECTION OF  
ROTATION IN FORWARD.

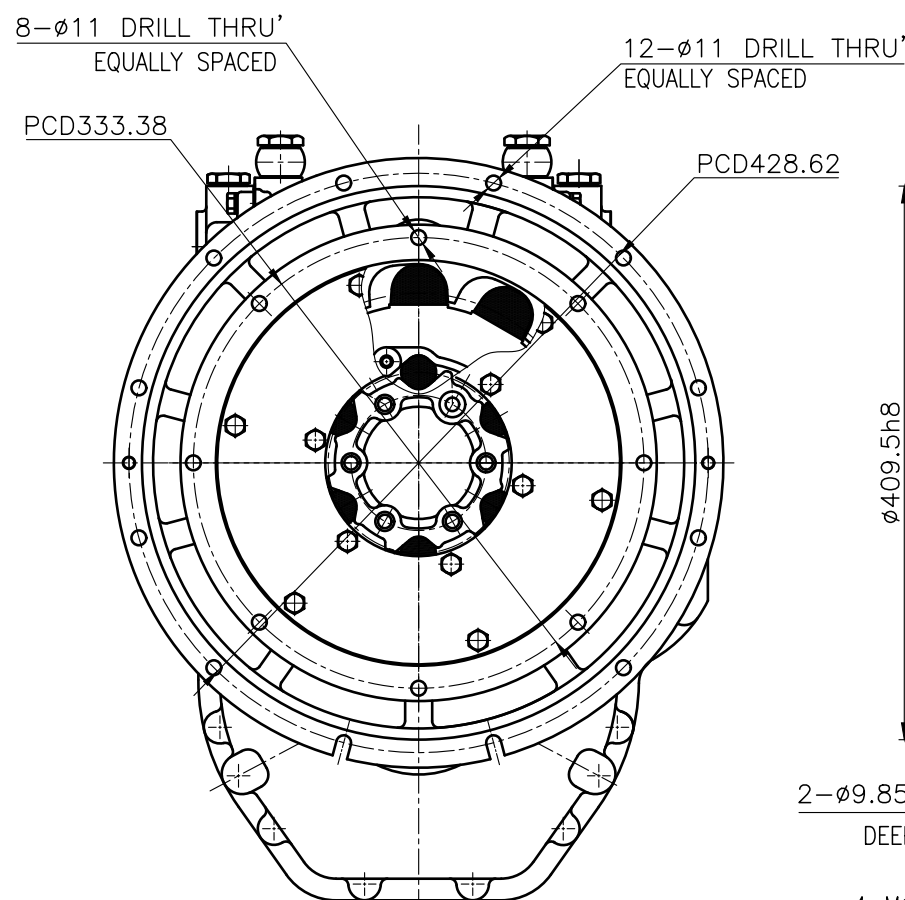

8-Ø11 DRILL THRU  
EQUALLY SPACED


12-Ø11 DRILL THRU'  
EQUALLY SPACED

PCD333.38


PCD428.62

REMARK (HOT)


- 1.HOUSING: SAE#3  
2.DRIVING RING: SAE 11.5"  
3.COUPLING TYPE : DUAL STAGE  
4.APPLICATION ENGINE : STANDARD

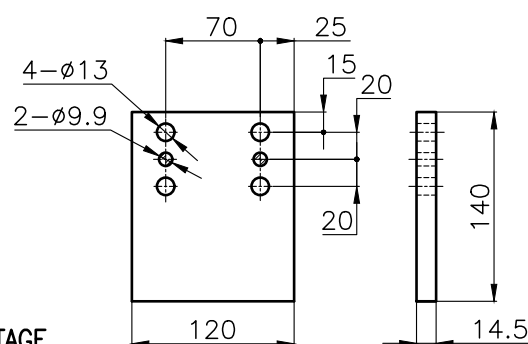

BRACKET DIMENSION

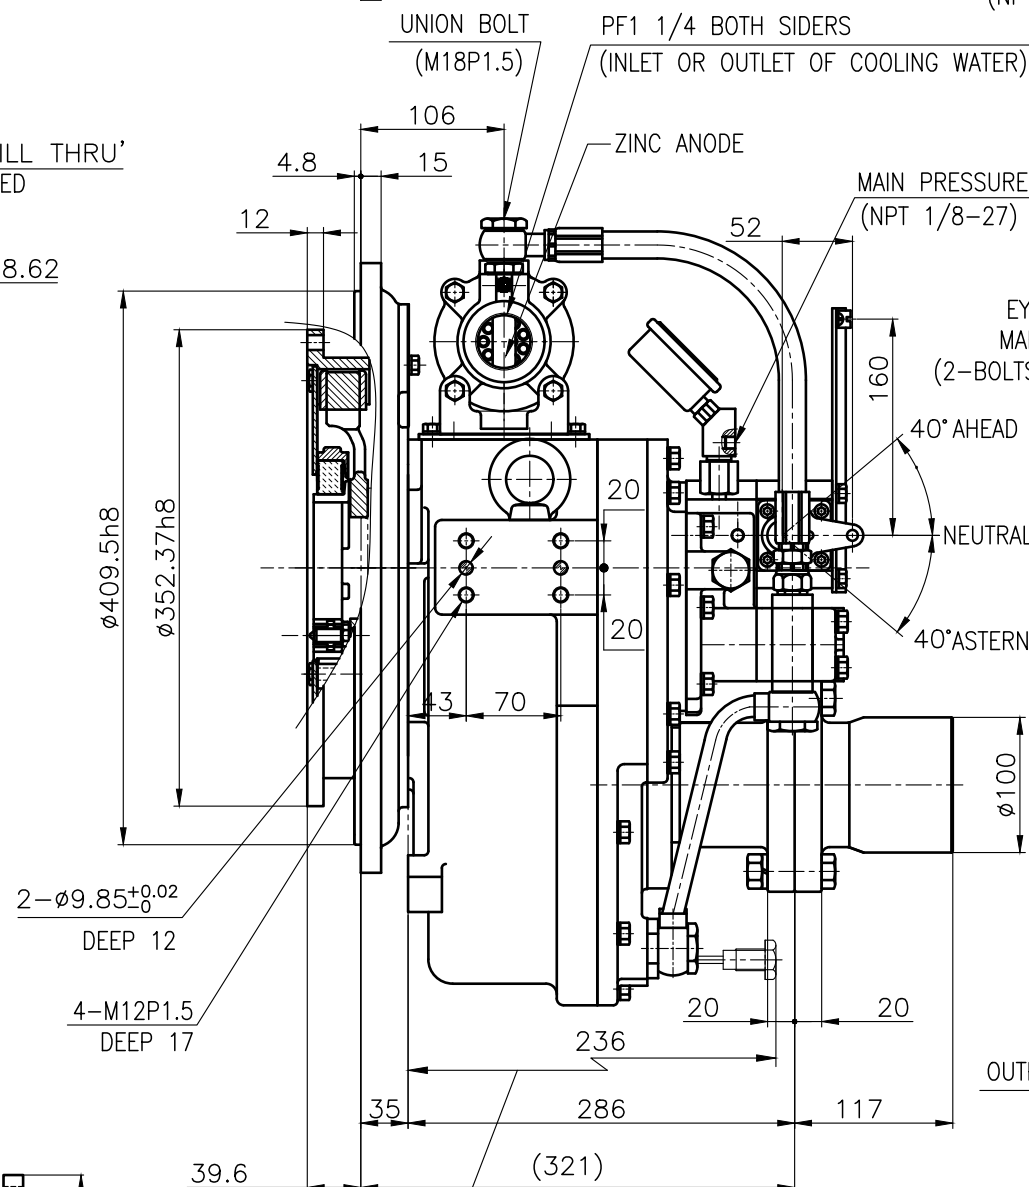

### CLEARANCE TO REMOVE MAGNET PLUG

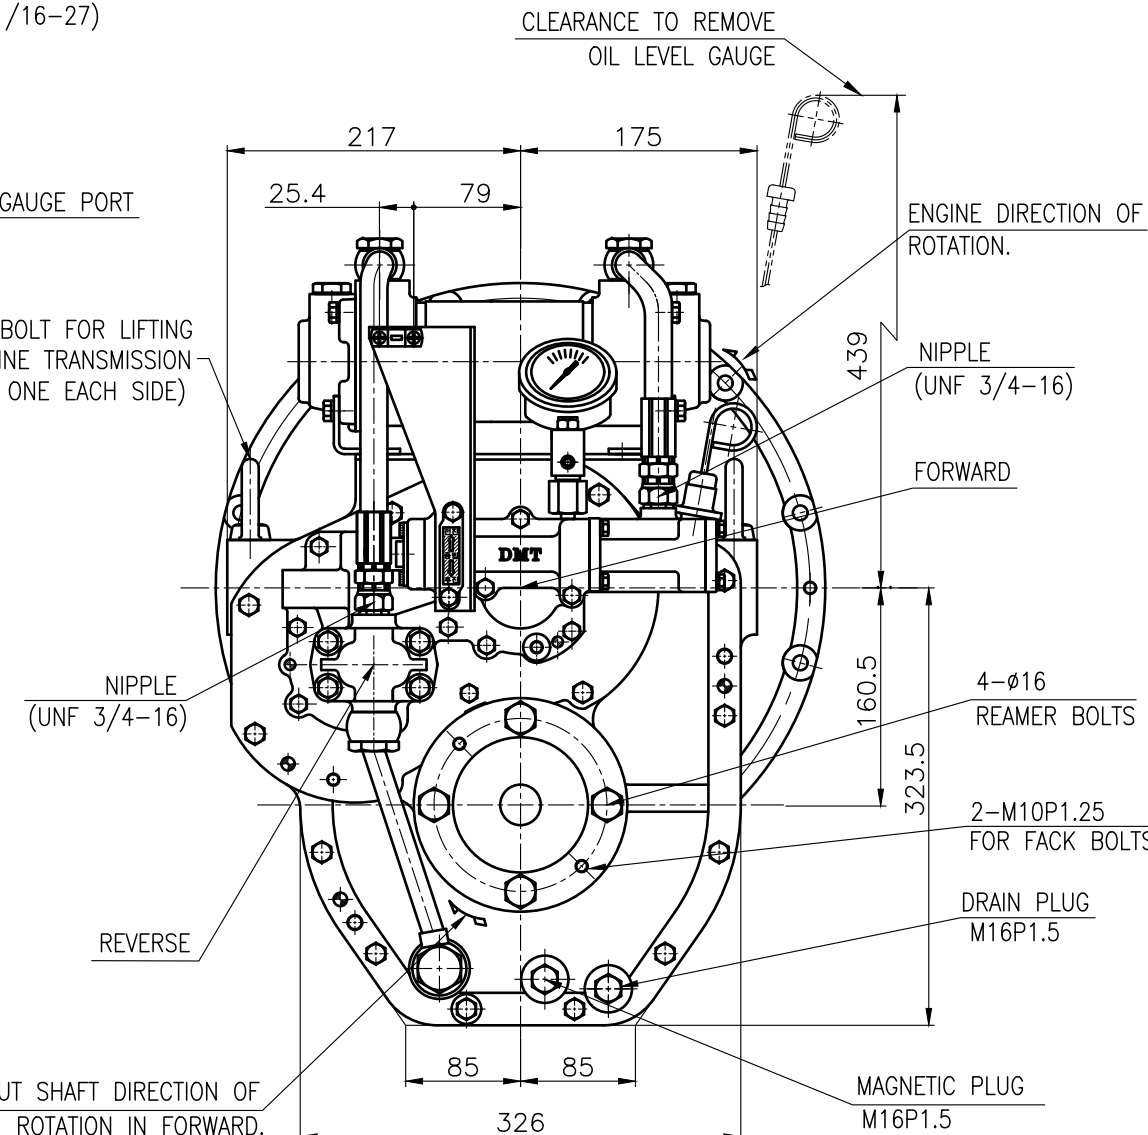

## CLEARANCE TO REMOVE OIL LEVEL GAUGE

ENGINE DIRECTION OF  
ROTATION.

NIPPLE  
(UNF 3/4-16)



## FORWARD

4-Ø16  
REAMER BOLTS

2-M10P1.25  
FOR FACK BOLTS

DRAIN PLUG  
M16P1.5

MAGNETIC PLUG  
M16P1.5

공 등 공 차 TOLERANCE ON					번호 NO.	품 PART NO.	품 PART NAME 명		개 수 Q'TY	재 MATERIAL	규 SIZE	비 고 REMARKS	
분 수 소 수 각 도 FRACTIONS DECIMALS ANGLES ± ± ±					재 MATERIAL				형 식 TYPE	DMT50A	원 도 번 ORIGINAL DWG. NO.		
절 삭 가 공 구 행 조 급 총 급 정 급 1 초과 4 이하 ± 0.3 ± 0.1 ± 0.05 4 16 ± 0.5 ± 0.2 ± 0.07 16 63 ± 0.7 ± 0.3 ± 0.1 63 250 ± 1.2 ± 0.5 ± 0.2 250 1000 ± 2.0 ± 0.8 ± 0.3						작성 DATE 2018.06.20	척 도 SCALE N/S		품 명 NAME	MARINE TRANSMISSION	도 번 DWG. NO.	050000A~F-3115DCH	개정 (REV.) 000
					승 인 APPROVED BY JK.Kim	검 도 CHECKED BY TH.Cha	재 도 DRAWN MA.Kim	설 계 DESIGNED					
 D-I INDUSTRIAL					크 기 SIZE	A 3	코 드 번 호 CODE ID. NO.						